


AMBIT Instruments Pty Ltd

50 TT Series

Teflon® Level Detector for High Purity, High Corrosive Applications

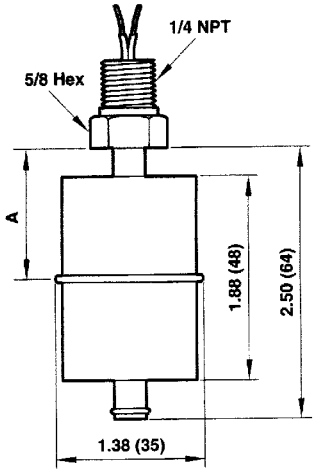

FEATURES:

- All Teflon® wetted surfaces
- PFA float for greater resistance to corrosives
- Low particulate generation
- Chemically inert

Specifications:

Maximum Pressure	70 PSI (4.8 bar)
Temp. Operating Range	-40° to 300°F (-40 to 149°C)
Mounting	1/4" NPT
Leads	22 AWG, 24" long
Recommended Minimum Liquid SP GR	.90

50 TT Series Ordering Numbers:

Part Number	Stem Material	Float Material	Description	Switch Rating
0111-024	TFE	PFA	SPST, NO Dry	20VA*
0112-024	TFE	PFA	SPST, NC Dry	20VA*
0113-024	TFE	PFA	SPST	3VA

* UL and CSA switch ratings are 20VA pilot duty rated; 120VAC - 240VAC
 ® Teflon is a registered trademark of E.I. DuPont De Nemours Co.

UL Recognized
File No. E 129277



CSA Approved
File No. LR 90981



A - actuation point is approximately midway of float travel in liquid with a specific gravity of 1.0.