


ADS PLUG SEALS

PLUG TYPE DIAPHRAGM SEAL MODEL ADS-PS2000

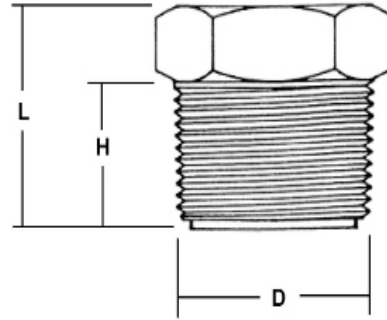

Nominal Plug Size	Instrument Connection	316 S/S Diaphragm	Minimum Pressures		Dimensions		
			63 & 100mm	150mm	L	H	D
1" (25mm)	3/8"BSPP	27mm Diameter	250kPa	800kPa	39	23	31.5
1.25" (32mm)	3/8"BSPP, 1/2"NPT	27mm Diameter	100kPa	600kPa	39.5	24	40
1.5" (40mm)	3/8"BSPP, 1/2"NPT	40mm Diameter	100kPa	250kPa	43	28.5	47
2" (50mm)	3/8"BSPP, 1/2"NPT	40mm Diameter	100kPa	250kPa	48	29	59

TECHNICAL SPECIFICATIONS

- Easily removed for cleaning
 - 316 stainless steel diaphragm and machined plug
 - Welded diaphragm
 - Standard "fill" fluid non-toxic silicon oil, Dow Corning 200 Fluid 100CS
 - Fitted with a filling plug for correct calibration after vacuum evacuation
 - Comprehensive range of other designs to suit all industries
- Designed and manufactured in Australia

Sales of ALL products are subject to our General Conditions of Quotation & Supply.
Technical specifications are subject to change without prior notice.

AMBIT INSTRUMENTS PTY LTD

ABN No 50 005 613 641

42 TITAN DRIVE CARRUM DOWNS Vic 3201 AUSTRALIA.

Phone: 03.9776.8888 Fax: 03 9776.8656

Email: contact@ambitinst.com.au

www.ambitinst.com.au

