


# ADS MINI & COMPACT SEALS

## MINI & COMPACT DIAPHRAGM SEALS ONE PIECE ALL WELDED CONSTRUCTION



COMPACT

MINI

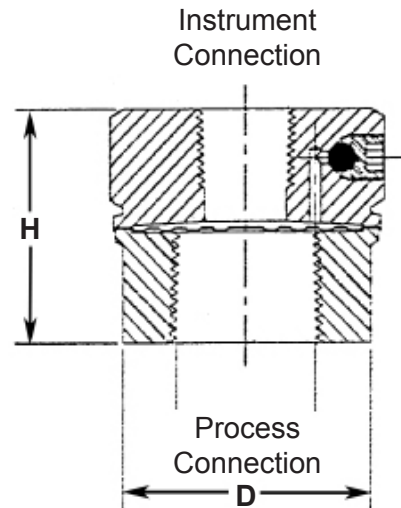

Dimensions		
Style	"H" Height	"D" Diameter
Mini	31mm	34mm
Compact	44mm	57mm

Style	Model	Process Connection	Instrument Connection	Pressure Rating	Minimum Range*	
					63mm	100mm
Mini	W205-03-SSS	1/2" NPT-F	1/4"NPT-F	14,000 kPa	600kPa	1600kPa
Compact	W305-03-SSS	1/2" NPT-F	1/4"NPT-F	7000 kPa	100kPa	250kPa
Compact	W305-04-SSS	1/2" NPT-F	1/2"NPT-F	7000 kPa	N/A	250kPa

\* For Bourdon type pressure gauges - by dial size

### TECHNICAL SPECIFICATIONS

- Material of Construction: 316 stainless steel
- Diaphragm: 316 stainless steel welded
- Fitted with a filling plug for correct calibration after vacuum evacuation
- Standard "fill" fluid non-toxic silicon oil, Dow Corning 200 Fluid 100CS

Sales of ALL products are subject to our General Conditions of Quotation & Supply.  
Technical specifications are subject to change without prior notice.

### AMBIT INSTRUMENTS PTY LTD

ABN No 50 005 613 641

42 TITAN DRIVE CARRUM DOWNS Vic 3201 AUSTRALIA.

Phone: 03.9776.8888 Fax: 03 9776.8656

Email: [contact@ambitinst.com.au](mailto:contact@ambitinst.com.au)

[www.ambitinst.com.au](http://www.ambitinst.com.au)

