


Magnetic Rotor Level Indicator

For working pressures up to 1600kPa

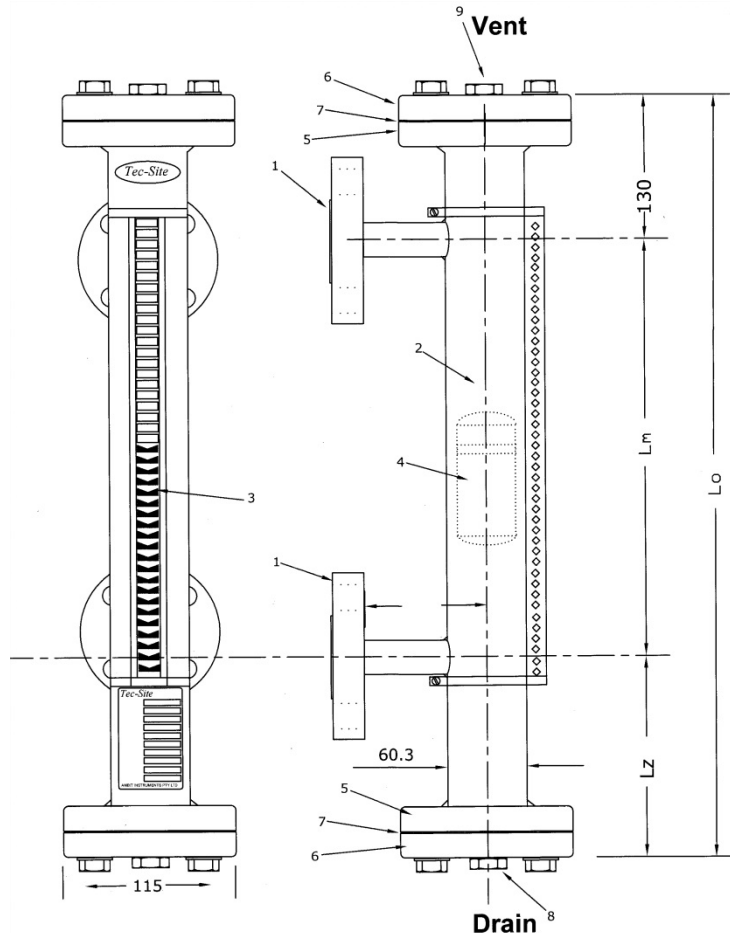

1. Process Connections : Flanged 316SS, 1/2" to 2"
 2. Float Chamber : 316L StSt, 50mm Sched 10, welded seam
 3. Indication Rail : Polycarbonate/Aluminium, colours red/white (standard)
 4. Float : Standard 316SS, Titanium for Low Density
 5. Float tube Flanges : 316L St St
 6. End Flanges : 316L St St, tapped 1/2"NPT
 7. Gaskets : Tensit BA Unit, options include PTFE, Spiral wound
 8. Drain : 316SS 1/2"NPT (plugged)
 9. Vent : 316SS 1/2"NPT (plugged)
- Lz Lengths for Standard Floats (S.G.)

| | |
|----------------------|----------------------|
| 0.66 to 0.74 : 345mm | 0.72 to 0.83 : 290mm |
| 0.83 to 0.94 : 240mm | 0.92 to 1.07 : 205mm |

Pressure Rating : 1600 kPa, hydro tested (cert included) to 2000 kPa.

Temperature rating : 100 Deg C as standard with options up to 300 Deg C.

**Sales of ALL products are subject to our General Conditions of Quotation & Supply.
Technical specifications are subject to change without prior notice.**



ACN No 50 005 613 641

42 TITAN DRIVE CARRUM DOWNS 3201 VICTORIA AUSTRALIA.

Phone: 03.9776.8888 Fax: 03 9776.8656

Email: contact@ambitinst.com.au

www.ambitinst.com.au

REV 1. 06/17



WORLD RECOGNISED
ACCREDITATION

LAB No 3103