


ADS-125 DIAPHRAGM SEAL

Chemical, 2 piece screwed “Clean-Out” type Diaphragm Seal

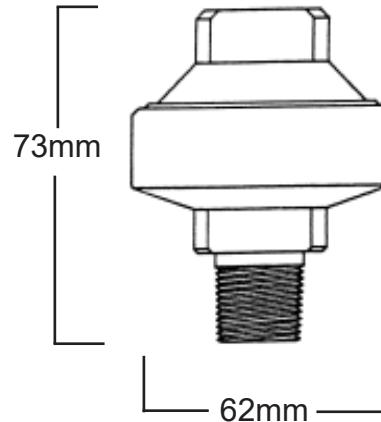

TECHNICAL SPECIFICATIONS

- Two piece body, screwed housing, 316 stainless steel construction
- Diaphragm - 40mm diameter, 316 stainless steel welded to top chamber
(Note: Splitting the housing does not affect the integrity of the fill)
- Nitrile “O” Ring Seal (standard)
- Nominal Pressure Range: -70 to +60,000 kPa
- General purpose, chemical and petroleum applications
- 3/8"BSPP or 1/2"NPT Instrument Connection
- 3/8"BSPT-M or 1/2"NPT-M Process Connection
- All welds integrity tested with helium
- Standard “fill” fluid non-toxic silicon oil, 100CS
- Options: Other diaphragm and housing material available on request
- Accuracy (by dial size): 63mm : 2.5%, 100mm & 150mm : 1.5%

Sales of ALL products are subject to our General Conditions of Quotation & Supply.
Technical specifications are subject to change without prior notice.

AMBIT
INSTRUMENTS PTY LTD
ABN 50 005 613 641

Office & Factory | 42 Titan Drive, Carrum Downs, Victoria, 3201, Australia
Ph: 03 9776 8888 | E: contact@ambitinst.com.au | W: ambitinst.com.au