

# SF300 Series & Averaging Pitot Tubes

## SPRINKLER FLOW TEST KIT

Verify water flow from Sprinkler Boost Pumps  
with the Ambit SF300 Test Kit

### Benefits Include:

- Large 114mm (4.1/2") dial gauge with certified accuracy
- Sturdy construction
- Handles 2000kPa operating pressure
- Quick connect / disconnect fittings supplied
- No programming required
- No toxic liquids or glass tubes
- Low cost to recalibrate and recertify
- Prompt factory support

### Kit Includes:

- Scaled 0/15", 0/20" or 0/30"Hg Differential Pressure Gauge with equalise and isolate valves fitted.
- Calibration certificate
- 1 x Red Hose (Positive)
- 1 x Blue Hose (Negative)
- 2 x Hanging Straps
- 2 x Brass 1/4"BSPT-M x 1/4" Flare Adaptors
- Sturdy foam lined carry case
- Instructions & Flow Charts are supplied  
(where Accutube Elements A.P.T.'s are supplied)



Sales of ALL products are subject to our General Conditions of Quotation & Supply.  
Technical specifications are subject to change without prior notice.

**AMBIT INSTRUMENTS PTY LTD**

ABN No 50 005 613 641

42 TITAN DRIVE CARRUM DOWNS Vic 3201 AUSTRALIA.

Phone: 03.9776.8888 Fax: 03 9776.8656

Email: [contact@ambitinst.com.au](mailto:contact@ambitinst.com.au)

[www.ambitinst.com.au](http://www.ambitinst.com.au)

NATA ENDORSED CALIBRATION  
CERTIFICATES AVAILABLE




WORLD RECOGNISED  
ACCREDITATION



# AVERAGING PITOT TUBES (a.k.a. Annubars)

Available to suit pipe sizes 1.5" to 10"

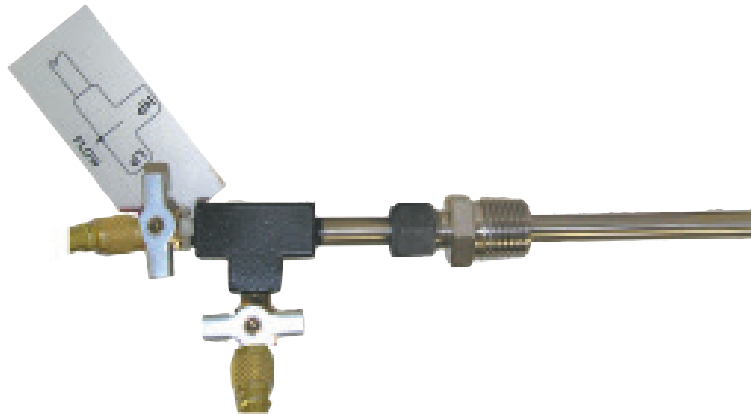

## Single Mount

Model 20T with 3/8" Diameter Tube		
Model No.	Maximum Flow	in.Hg at Maximum Flow
SF20T-1.5"	832 LPM	48.7
SF20T-2"	1251 LPM	33.5
SF20T-2.5"	1481 LPM	24.7
SF20T-3"	2066 LPM	17.3
SF20T-4"	2861 LPM	11.0
SF20T-6"	4729 LPM	5.2

Model 22L with 1/2" Diameter Tube		
Model No.	Maximum Flow	in.Hg at Maximum Flow
SF22L-2"	1663 LPM	77.7
SF22L-2.5"	2086 LPM	52.0
SF22L-3"	2940 LPM	37.2
SF22L-4"	4131 LPM	23.9
SF22L-6"	6672 LPM	11.9
SF22L-8"	9198 LPM	7.3
SF22L-10"	11,920 LPM	4.8

## Double Mount

Model 21T with 3/8" Diameter Tube		
Model No.	Maximum Flow	in.Hg at Maximum Flow
SF21T-3"	3477 LPM	49.0
SF21T-4"	4951 LPM	32.8
SF21T-6"	8525 LPM	17.1
SF21T-8"	11,020 LPM	10.7
SF21T-10"	14,823 LPM	7.1

Note: Other pipe sizes and scheds are available - Contact our sales team for details.

Sales of ALL products are subject to our General Conditions of Quotation & Supply.  
Technical specifications are subject to change without prior notice.

## AMBIT INSTRUMENTS PTY LTD

ABN No 50 005 613 641

42 TITAN DRIVE CARRUM DOWNS Vic 3201 AUSTRALIA.

Phone: 03.9776.8888 Fax: 03 9776.8656

Email: [contact@ambitinst.com.au](mailto:contact@ambitinst.com.au)

[www.ambitinst.com.au](http://www.ambitinst.com.au)



NATA ENDORSED CALIBRATION  
CERTIFICATES AVAILABLE

